


ATTACH-A-PULLER GLOBAL(ABPG)

SPECIFICATION SHEET

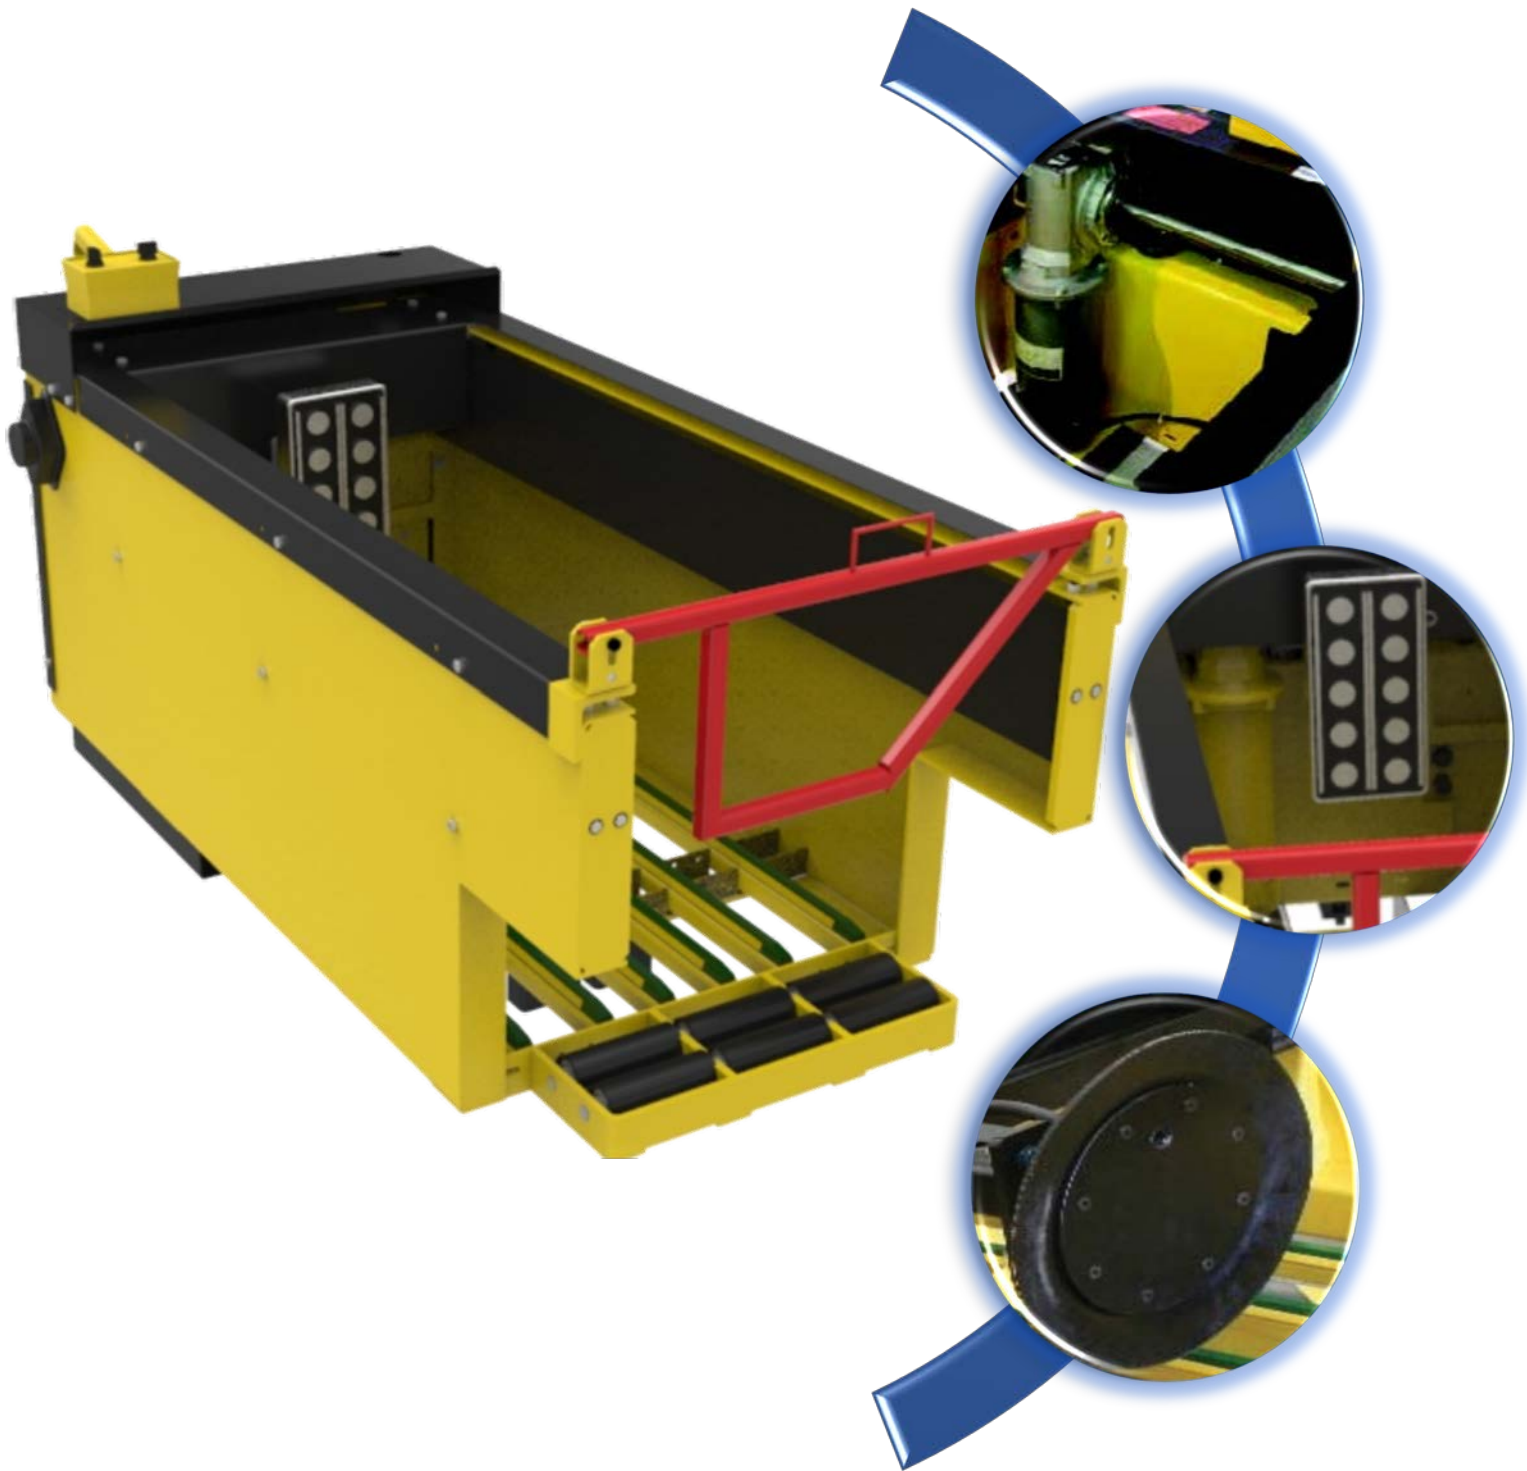

PORTABLE BATTERY CHANGER

The ABPG is an ALL Electric Economical Attachment for a Pallet Jack. Powered from the Pallet Jack Battery and Limited to the Customer Supplied Pallet Jack's Raise/Lower Capabilities. The ABPG is a Safe, Affordable, and Flexible Small Fleet Battery Changer.

FEATURES

Portable Unit That Mounts to Existing Pallet Jack

Front Loading

Available in 24", 32", & 40" Compartment Widths

Powered Vacuum Cup or Magnet Extraction

Pallet Jack Battery Provides Power to the ABPG

Tethered Controls Mount for Operation Anywhere on Unit

24-Volt

Provided with Mounting Brackets & 9" Fork Pockets

Included "Y" Cable Connection to Pallet Jack

Battery Safety Gate Standard



Durable Electric Gear Motor Drives Two Roller Chains, Moving the Battery In and Out of the Carriage



Tethered Remote Control has a Magnet on the Back and can be Attached anywhere on the Unit



Y-Cable Connects Between the ABPG, the Pallet Jack, and the Pallet Jack's Battery

Options



Vacuum Cup Extraction (-V)




Magnet Extraction (-M)

Benefits

Outrigger Compatible Design


Durable Electric Gear Motor

Accommodates Up to 50" Battery Length

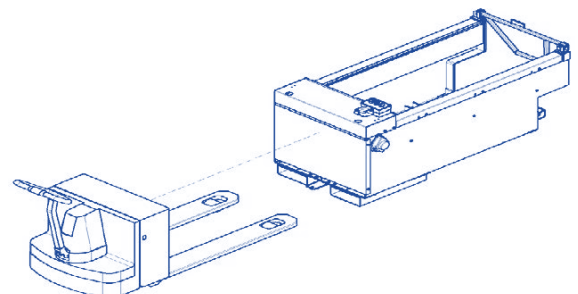


ATTACH-A-PULLER GLOBAL(ABPG)


SPECIFICATION SHEET

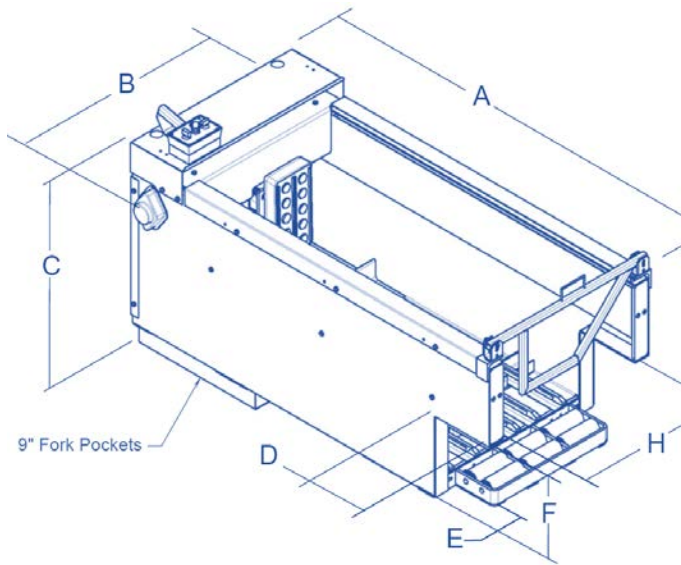

DETAIL 1

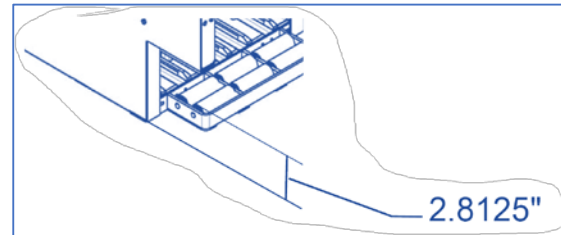

DETAIL 2

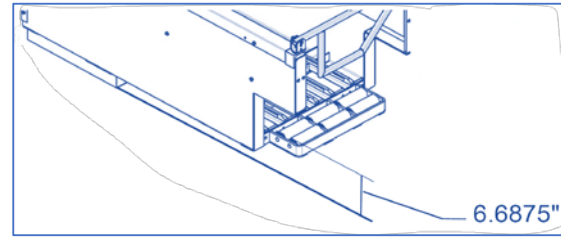

GLOBAL ATTACH-A-PULLER		ABPG-24	ABPG-32	ABPG-40
General Information				
Maximum Capacity with 48" Forks		4000 lbs.		
Maximum Capacity with 60" Forks		5000 lbs.		
Unit R-Height from Base to Front Roller (SEE DETAIL 1)		2.8125"		
Unit R-Height with standard FP9 Fork Pockets (SEE DETAIL 2)		6.6875"		
Available Voltage (based on pallet jack used)		24V, 36V, 48V		
DIMENSIONAL SPECIFICATIONS				
A	Overall Length	68"		
B	Overall Width	33.5"	41.5"	49.5"
C	Overall Height	30.5"		
D	Outrigger Cutout Depth	10.375"		
E	Outrigger Cutout Width	4.25"	8.25"	12.25"
F	Outrigger Cutout Height	13.5"		
G1	Compartment Depth (ext. arm retracted)	50.5"		
G2	Compartment Depth (ext. arm extended)	45.5"		
H	Compartment Width	24.75"	32.75"	40.75"
I	Recommended Minimum Battery Width	6"		
J	Recommended Minimum Battery Height	19"		
K	Recommended Maximum Battery Width	23.5"	31.5"	39.5"
L	Recommended Maximum Battery Length	50"		
M	Recommended Maximum Battery Height	38"	40"	48"
N	Maximum Fork Width (FP9)	9.25"	9.25"	9.25"
O	Max Outside to Outside distance of Forks (FP9)	27"	27"	27"
P	Minimum Distance Between Forks (FP9)	8.5"	8.5"	8.5"