
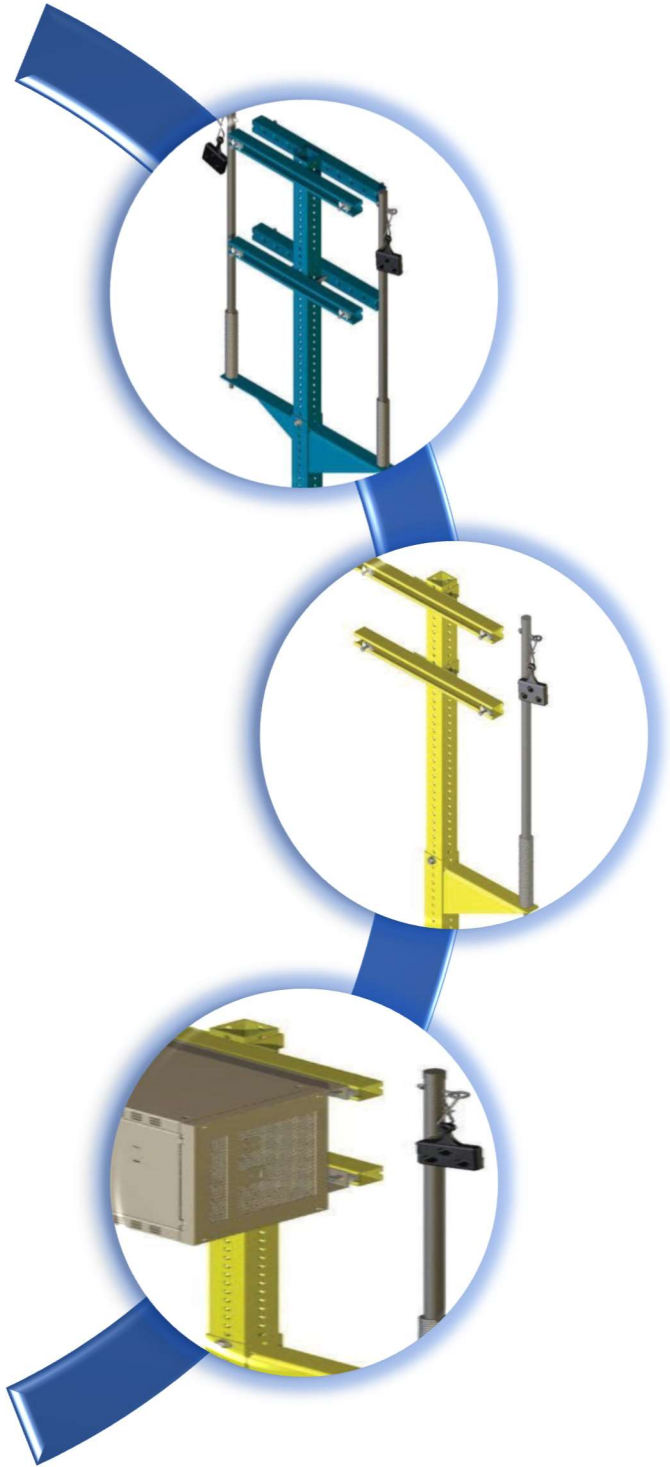


HF CHARGER SUPPORT

SPECIFICATION SHEET

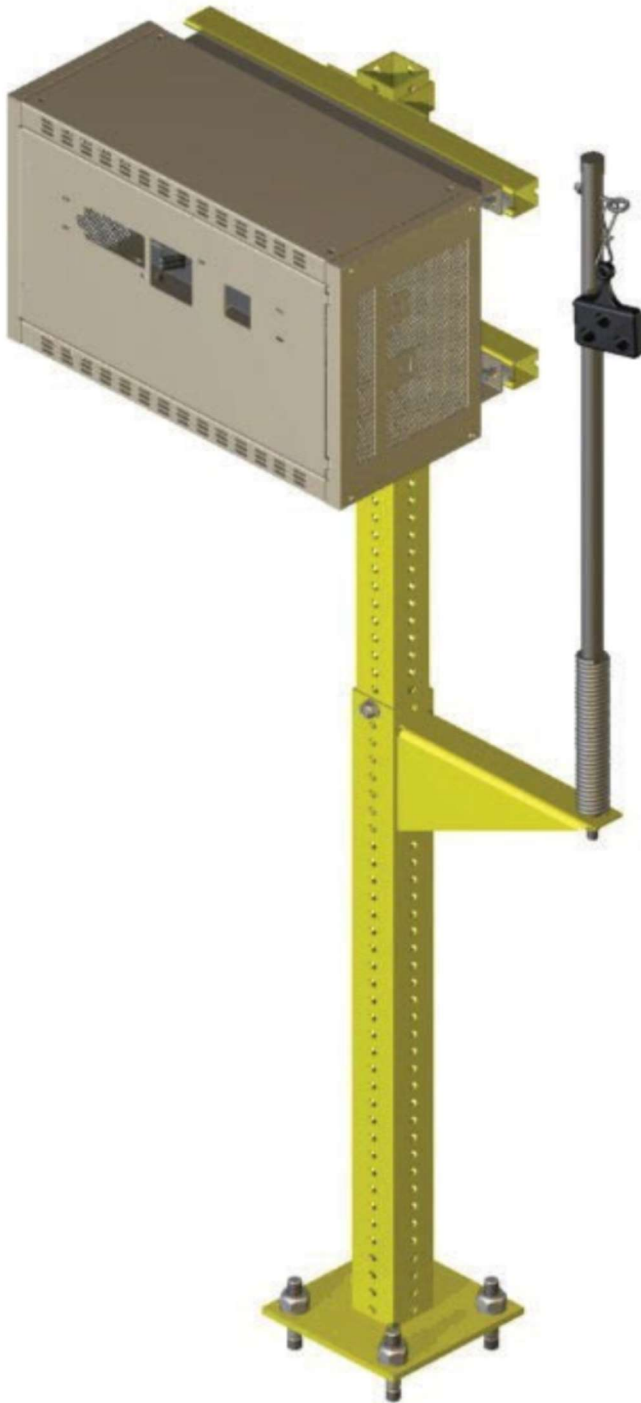

HF CHARGER SUPPORT

SPECIFICATION SHEET



HIGH FREQUENCY CHARGER SUPPORT (CSHF)


The CSHF Floor Mounted High Frequency Charger Support is Designed to Provide Our Customers with a Simple and Compact Solution for Charging Motive Batteries. Ideal for Minimal Floor Space within Opportunity Charging Applications.

OPTIONS

- Single (C) and Double (2C) Charger Stands
- Powder Coated Black (color not as pictured)
- Available with crossbar width choice of 12", 17" and 20"
- Height adjustable up to 72"
- On Double Charger Option, specify charger placement at time of order (Top to Bottom or Back to Back Charger Mounting)
- Compatible Battery Cable Retractor (BCR-58H) not included and sold separately.




High Frequency Charger Support with Cable Retractor Bracket (Cable Retractor not included)

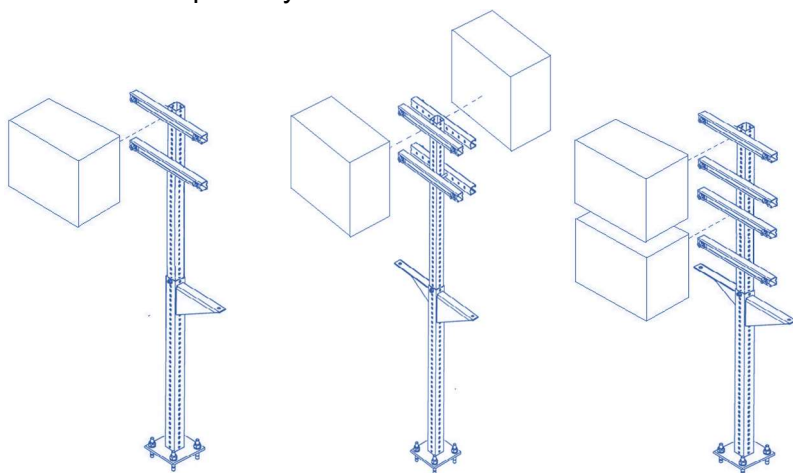

Single Charger

Double Charger
Chargers mounted
back to back

Double Charger
Chargers mounted
top to bottom

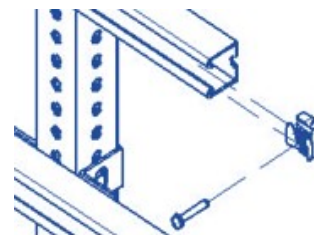

Install Note:

Charger Mount Utilize Twirl Nuts on Strut Channel to Match Up with Charging Unit

Model	Stand Description	"W" Width
CSHF-72x10-C	72"x10" Single Charger	(2) 10" Cross Strut Channel
CSHF-72x10-2C	72"x10" Double Charger	(4) 10" Cross Strut Channel
CSHF-72x17-C	72"x17" Single Charger	(2) 17" Cross Strut Channel
CSHF-72x17-2C	72"x17" Double Charger	(4) 17" Cross Strut Channel
CSHF-72x20-C	72"x20" Single Charger	(2) 20" Cross Strut Channel
CSHF-72x20-2C	72"x20" Double Charger	(4) 20" Cross Strut Channel

